


CYLINDRICAL ANTI VIBRATION MOUNTS : TYPE E Female

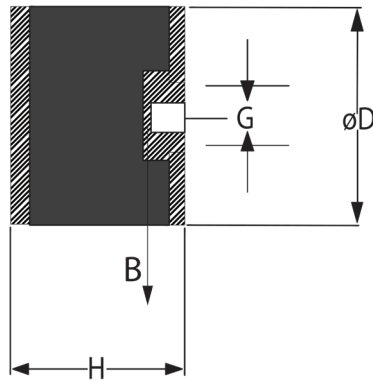

FEMALE - FOOT/BUMP STOP Cylindrical mounts, a simple and cost effective mount. For use in compression and shear. A very large range of available size and studs.

H = Height
D = Diameter
G = Tread Size
B = Thread Depth

Applications:

Exhaust Systems, Small Fans, Instrument Panels. Compressors, Motors, Electronic Control Panels.

Materials:

Natural Rubber
Styrene Butadiene Rubber (SBR)
Neoprene
Nitrile

Item Number	D (mm)	H (mm)	G (mm)	45 Shore Hardness (Max KG)		60 Shore Hardness (Max KG)	
				Load	Sheer	Load	Sheer
VCF0607M3	6	7	M3	1.3	-	2.2	-
VCF0808M3	8	8	M3	2.4	-	4.4	-
VCF0810M3	8	10	M3	2.1	-	5	-
VCF0912M3	9	12	M3	1.8	-	5.4	-
VCF0912M4	9	12	M4	1.8	-	5.4	-
VCF0912M5	9	12	M5	1.8	-	5.4	-
VCF1008M3	10	8	M3	2.7	-	7.9	-
VCF1008M4	10	8	M4	2.7	-	7.9	-
VCF1008M5	10	8	M5	2.7	-	7.9	-
VCF1010M3	10	10	M3	2.5	-	7.7	-
VCF1010M4	10	10	M4	2.5	-	7.7	-
VCF1010M5	10	10	M5	2.5	-	7.7	-
VCF1015M3	10	15	M3	1.8	-	5.6	-
VCF1015M4	10	15	M4	1.8	-	5.6	-
VCF1015M5	10	15	M5	1.8	-	5.6	-
VCF1017M3	10	17	M3	1.6	-	5	-
VCF1017M4	10	17	M4	1.6	-	5	-
VCF1017M5	10	17	M5	1.6	-	5	-
VCF1018M3	10	18	M3	1.4	-	4.5	-
VCF1018M4	10	18	M4	1.4	-	4.5	-
VCF1018M5	10	18	M5	1.4	-	4.5	-
VCF1111M3	11	11	M3	2	-	5.7	-
VCF1111M4	11	11	M4	2	-	5.7	-
VCF1111M5	11	11	M5	2	-	5.7	-
VCF1210M3	12	10	M3	3.5	-	10	-
VCF1210M4	12	10	M4	3.5	-	10	-
VCF1210M5	12	10	M5	3.5	-	10	-
VCF1326M3	13	26	M3	1.4	-	4.5	-
VCF1326M4	13	26	M4	1.4	-	4.5	-

This information is for guidance only. Customers are recommended to contact us for further technical information on products and applications. We reserve the right to alter specifications or withdraw products without notice.

				45 Shore Hardness (Max KG)		60 Shore Hardness (Max KG)	
Item Number	D (mm)	H (mm)	G (mm)	Load	Sheer	Load	Sheer
VCF1326M5	13	26	M5	1.4	-	4.5	-
VCF1508M3	15	8	M3	12	-	25	-
VCF1508M4	15	8	M4	12	-	25	-
VCF1510M3	15	10	M3	11	-	16.8	-
VCF1510M4	15	10	M4	11	-	16.8	-
VCF1512M3	15	12	M3	8.2	-	14.5	-
VCF1512M4	15	12	M4	8.2	-	14.5	-
VCF1513M3	15	13	M3	7.9	-	14.1	-
VCF1513M4	15	13	M4	7.9	-	14.1	-
VCF1513M5	15	13	M5	7.9	-	14.1	-
VCF1515M3	15	15	M3	6	-	13.3	-
VCF1515M4	15	15	M4	6	-	13.3	-
VCF1515M5	15	15	M5	6	-	13.3	-
VCF1520M3	15	20	M3	4.9	-	10	-
VCF1520M4	15	20	M4	4.9	-	10	-
VCF1520M5	15	20	M5	4.9	-	10	-
VCF1525M3	15	25	M3	2.9	-	7.25	-
VCF1525M4	15	25	M4	2.9	-	7.25	-
VCF1525M5	15	25	M5	2.9	-	7.25	-
VCF1530M3	15	30	M3	1.75	-	4.1	-
VCF1530M4	15	30	M4	1.75	-	4.1	-
VCF1530M5	15	30	M5	1.75	-	4.1	-
VCF1610M5	16	10	M5	15	-		-
VCF1615M5	16	15	M5	10	-		-
VCF1618M3	16	18	M3	6	-	16.7	-
VCF1618M4	16	18	M4	6	-	13.3	-
VCF1618M5	16	18	M5	6	-	13.3	-
VCF2015M4	20	15	M4	12.3	-	25.5	-
VCF2015M5	20	15	M5	12.3	-	25.5	-
VCF2017M4	20	17	M4	11.8	-	24.6	-
VCF2017M5	20	17	M5	11.8	-	24.6	-
VCF2020M5	20	20	M5	11	-	23.5	-
VCF2020M6	20	20	M6	11	-	23.5	-
VCF2020M8	20	20	M8	11	-	23.5	-
VCF2023M5	20	23	M5	10.8	-	23	-
VCF2023M6	20	23	M6	10.8	-	23	-
VCF2023M8	20	23	M8	10.8	-	23	-
VCF2025M5	20	25	M5	10.5	-	22.7	-
VCF2025M6	20	25	M6	10.5	-	22.7	-
VCF2025M8	20	25	M8	10.5	-	22.7	-
VCF2030M5	20	30	M5	10.2	-	22.3	-
VCF2030M6	20	30	M6	10.2	-	22.3	-

This information is for guidance only. Customers are recommended to contact us for further technical information on products and applications.
We reserve the right to alter specifications or withdraw products without notice.

				45 Shore Hardness (Max KG)		60 Shore Hardness (Max KG)	
Item Number	D (mm)	H (mm)	G (mm)	Load	Sheer	Load	Sheer
VCF2030M8	20	30	M8	10.2	-	22.3	-
VCF2515M6	25	15	M6	21.5	-	43.2	-
VCF2515M8	25	15	M8	21.5	-	43.2	-
VCF2517M6	25	17	M6	20.7	-	42.1	-
VCF2517M8	25	17	M8	20.7	-	42.1	-
VCF2520M6	25	20	M6	18.4	-	38.5	-
VCF2520M8	25	20	M8	18.4	-	38.5	-
VCF2522M6	25	22	M6	17.8	-	37.4	-
VCF2522M8	25	22	M8	17.8	-	37.4	-
VCF2525M6	25	25	M6	17.1	-	36.6	-
VCF2525M8	25	25	M8	17.1	-	36.6	-
VCF2527M6	25	27	M6	16.8	-	36.2	-
VCF2527M8	25	27	M8	16.8	-	36.2	-
VCF2530M6	25	30	M6	16.4	-	35.6	-
VCF2530M8	25	30	M8	16.4	-	35.6	-
VCF2622M6	26	22	M6	19.5	-	41.2	-
VCF2622M8	26	22	M8	19.5	-	41.2	-
VCF3015M10	30	15	M10	37.8	-	72.3	-
VCF3015M6	30	15	M6	37.8	-	72.3	-
VCF3015M8	30	15	M8	37.8	-	72.3	-
VCF3018M10	30	18	M10	34	-	63	-
VCF3018M6	30	18	M6	34	-	63	-
VCF3018M8	30	18	M8	34	-	63	-
VCF3020M10	30	20	M10	29.5	-	60	-
VCF3020M6	30	20	M6	29.5	-	60	-
VCF3020M8	30	20	M8	29.5	-	60	-
VCF3022M10	30	22	M10	27	-	57	-
VCF3022M6	30	22	M6	27	-	57	-
VCF3022M8	30	22	M8	27	-	57	-
VCF3025M10	30	25	M10	26.3	-	55.2	-
VCF3025M6	30	25	M6	26.3	-	55.2	-
VCF3025M8	30	25	M8	26.3	-	55.2	-
VCF3028M8	30	28	M8	25.4	-	54	-
VCF3030M10	30	30	M10	24.8	-	52.9	-
VCF3030M6	30	30	M6	24.8	-	52.9	-
VCF3030M8	30	30	M8	24.8	-	52.9	-
VCF3035M10	30	35	M10	24	-	51	-
VCF3035M6	30	35	M6	24	-	51	-
VCF3035M8	30	35	M8	24	-	51	-
VCF3040M10	30	40	M10	23.3	-	50.8	-
VCF3040M6	30	40	M6	23.3	-	50.8	-
VCF3040M8	30	40	M8	23.3	-	50.8	-

This information is for guidance only. Customers are recommended to contact us for further technical information on products and applications.
We reserve the right to alter specifications or withdraw products without notice.

				45 Shore Hardness (Max KG)		60 Shore Hardness (Max KG)	
Item Number	D (mm)	H (mm)	G (mm)	Load	Sheer	Load	Sheer
VCF3045M10	30	45	M10	20	-	40	-
VCF3045M6	30	45	M6	20	-	40	-
VCF3045M8	30	45	M6	20	-	40	-
VCF4015M10	40	15	M10	71	-	130	-
VCF4015M6	40	15	M6	71	-	130	-
VCF4015M8	40	15	M8	71	-	130	-
VCF4020M10	40	20	M10	63.2	-	122.6	-
VCF4020M6	40	20	M6	63.2	-	122.6	-
VCF4020M8	40	20	M8	63.2	-	122.6	-
VCF4025M10	40	25	M10	54	-	112	-
VCF4025M6	40	25	M6	54	-	112	-
VCF4025M8	40	25	M8	54	-	112	-
VCF4028M10	40	28	M10	49.2	-	104	-
VCF4028M6	40	28	M6	49.2	-	104	-
VCF4028M8	40	28	M8	49.2	-	104	-
VCF4030M10	40	30	M10	48.1	-	100.2	-
VCF4030M6	40	30	M6	48.1	-	100.2	-
VCF4030M8	40	30	M8	48.1	-	100.2	-
VCF4035M10	40	35	M10	46	-	97.8	-
VCF4035M6	40	35	M6	46	-	97.8	-
VCF4035M8	40	35	M8	46	-	97.8	-
VCF4038M10	40	38	M10	44.5	-	95.6	-
VCF4038M6	40	38	M6	44.5	-	95.6	-
VCF4038M8	40	38	M8	44.5	-	95.6	-
VCF4040M10	40	40	M10	43.7	-	93.5	-
VCF4040M6	40	40	M6	43.7	-	93.5	-
VCF4040M8	40	40	M8	43.7	-	93.5	-
VCF4045M10	40	45	M10	42.1	-	78.3	-
VCF4045M6	40	45	M6	42.1	-	78.3	-
VCF4045M8	40	45	M8	42.1	-	78.3	-
VCF4060M10	40	60	M10	38.9	-	48.3	-
VCF4060M6	40	60	M6	38.9	-	48.3	-
VCF4060M8	40	60	M8	38.9	-	48.3	-
VCF5020M10	50	20	M10	124.8	-	230.6	-
VCF5020M12	50	20	M12	124.8	-	230.6	-
VCF5020M8	50	20	M8	124.8	-	230.6	-
VCF5025M10	50	25	M10	97.6	-	190	-
VCF5025M12	50	25	M12	97.6	-	190	-
VCF5025M8	50	25	M8	97.6	-	190	-
VCF5030M10	50	30	M10	84.6	-	170.6	-
VCF5030M12	50	30	M12	84.6	-	170.6	-
VCF5030M8	50	30	M8	84.6	-	170.6	-

This information is for guidance only. Customers are recommended to contact us for further technical information on products and applications.
We reserve the right to alter specifications or withdraw products without notice.

				45 Shore Hardness (Max KG)		60 Shore Hardness (Max KG)	
Item Number	D (mm)	H (mm)	G (mm)	Load	Sheer	Load	Sheer
VCF5035M10	50	35	M10	77.4	-	159.8	-
VCF5035M12	50	35	M12	77.4	-	159.8	-
VCF5035M8	50	35	M8	77.4	-	159.8	-
VCF5037M10	50	37	M10	74	-	156	-
VCF5037M12	50	37	M12	74	-	156	-
VCF5037M8	50	37	M8	74	-	156	-
VCF5040M10	50	40	M10	73	-	153.3	-
VCF5040M12	50	40	M12	73	-	153.3	-
VCF5040M8	50	40	M8	73	-	153.3	-
VCF5045M10	50	45	M10	70.1	-	149	-
VCF5045M12	50	45	M12	70.1	-	149	-
VCF5045M8	50	45	M8	70.1	-	149	-
VCF5050M10	50	50	M10	68.1	-	146	-
VCF5050M12	50	50	M12	68.1	-	146	-
VCF5050M8	50	50	M8	68.1	-	146	-
VCF5080M10	50	80	M10	42.6	-	91.2	-
VCF5080M12	50	80	M12	42.6	-	91.2	-
VCF5080M8	50	80	M8	42.6	-	91.2	-
VCF6020M10	60	20	M10	198.6	-	334.3	-
VCF6020M12	60	20	M12	198.6	-	334.3	-
VCF6020M8	60	20	M8	198.6	-	334.3	-
VCF6025M10	60	25	M10	152.5	-	283.8	-
VCF6025M12	60	25	M12	152.5	-	283.8	-
VCF6025M8	60	25	M8	152.5	-	283.8	-
VCF6030M10	60	30	M10	129.6	-	240	-
VCF6030M12	60	30	M12	129.6	-	240	-
VCF6030M8	60	30	M8	129.6	-	240	-
VCF6035M10	60	35	M10	123.7	-	229.8	-
VCF6035M12	60	35	M12	123.7	-	229.8	-
VCF6035M8	60	35	M8	123.7	-	229.8	-
VCF6040M10	60	40	M10	112	-	209.1	-
VCF6040M12	60	40	M12	112	-	209.1	-
VCF6040M8	60	40	M8	112	-	209.1	-
VCF6045M10	60	45	M10	100.1	-	186.8	-
VCF6045M12	60	45	M12	100.1	-	186.8	-
VCF6045M8	60	45	M8	100.1	-	186.8	-
VCF6050M10	60	50	M10	88.9	-	165.5	-
VCF6050M12	60	50	M12	88.9	-	165.5	-
VCF6050M8	60	50	M8	88.9	-	165.5	-
VCF6060M10	60	60	M10	79.2	-	154	-
VCF6060M12	60	60	M12	79.2	-	154	-
VCF6060M8	60	60	M8	79.2	-	154	-

This information is for guidance only. Customers are recommended to contact us for further technical information on products and applications.
We reserve the right to alter specifications or withdraw products without notice.

				45 Shore Hardness (Max KG)		60 Shore Hardness (Max KG)	
Item Number	D (mm)	H (mm)	G (mm)	Load	Sheer	Load	Sheer
VCF6535M12	65	35	M12	160	-	350	-
VCF7025M10	70	25	M10	241.3	-	523.8	-
VCF7025M12	70	25	M12	241.3	-	523.8	-
VCF7030M10	70	30	M10	215.4	-	457.5	-
VCF7030M12	70	30	M12	215.4	-	457.5	-
VCF7035M10	70	35	M10	189.6	-	391.1	-
VCF7035M12	70	35	M12	189.6	-	391.1	-
VCF7040M10	70	40	M10	163.8	-	324.8	-
VCF7040M12	70	40	M12	163.8	-	324.8	-
VCF7045M10	70	45	M10	157.5	-	310.5	-
VCF7045M12	70	45	M12	157.5	-	310.5	-
VCF7050M10	70	50	M10	142.3	-	292.7	-
VCF7050M12	70	50	M12	142.3	-	292.7	-
VCF7055M10	70	55	M10	136.1	-	283.4	-
VCF7055M12	70	55	M12	136.1	-	283.4	-
VCF7060M10	70	60	M10	120	-	220	-
VCF7060M12	70	60	M12	120	-	220	-
VCF7070M10	70	70	M10	98	-	178	-
VCF7070M12	70	70	M12	98	-	178	-
VCF75100M10	75	0	M10	125.3	-	265	-
VCF75100M12	75	0	M12	125.3	-	265	-
VCF7525M10	75	25	M10	299.4	-	650	-
VCF7525M12	75	25	M12	299.4	-	650	-
VCF7530M10	75	30	M10	267.3	-	567.7	-
VCF7530M12	75	30	M12	267.3	-	567.7	-
VCF7535M10	75	35	M10	235.3	-	485.3	-
VCF7535M12	75	35	M12	235.3	-	485.3	-
VCF7540M10	75	40	M10	203.2	-	403	-
VCF7540M12	75	40	M12	203.2	-	403	-
VCF7545M10	75	45	M10	190.5	-	385.3	-
VCF7545M12	75	45	M12	190.5	-	385.3	-
VCF7548M12	75	48	M12	182.1	-	372	-
VCF7550M10	75	50	M10	176.6	-	363.2	-
VCF7550M12	75	50	M12	176.6	-	363.2	-
VCF7555M10	75	55	M10	168.9	-	351.7	-
VCF7555M12	75	55	M12	168.9	-	351.7	-
VCF7560M10	75	60	M10	155	-	320	-
VCF7560M12	75	60	M12	155	-	320	-
VCF7570M10	75	70	M10	140	-	296.4	-
VCF7570M12	75	70	M12	140	-	296.4	-
VCF8030M14	80	30	M14	347.5	-	658.7	-
VCF100100M12	100	100	M12	250	-	400.6	-

This information is for guidance only. Customers are recommended to contact us for further technical information on products and applications.
We reserve the right to alter specifications or withdraw products without notice.

				45 Shore Hardness (Max KG)		60 Shore Hardness (Max KG)	
Item Number	D (mm)	H (mm)	G (mm)	Load	Sheer	Load	Sheer
VCF100100M16	100	100	M16	250	-	400.6	-
VCF10035M12	100	35	M12	469.3	-	914.3	-
VCF10035M16	100	35	M16	469.3	-	914.3	-
VCF10040M12	100	40	M12	454.1	-	854.9	-
VCF10040M16	100	40	M16	454.1	-	854.9	-
VCF10045M12	100	45	M12	413.5	-	413.5	-
VCF10045M16	100	45	M16	413.5	-	413.5	-
VCF10050M12	100	50	M12	357.7	-	790	-
VCF10050M16	100	50	M16	357.7	-	790	-
VCF10055M12	100	55	M12	345.5	-	692.9	-
VCF10055M16	100	55	M16	345.5	-	692.9	-
VCF10060M12	100	60	M12	302	-	605	-
VCF10060M16	100	60	M16	302	-	605	-
VCF10065M12	100	65	M12	267	-	558	-
VCF10065M16	100	65	M16	267	-	558	-
VCF10070M12	100	70	M12	290	-	530.6	-
VCF10070M16	100	70	M16	290	-	530.6	-
VCF10075M12	100	75	M12	275	-	436.6	-
VCF10075M16	100	75	M16	275	-	436.6	-
VCF10080M12	100	80	M12	263	-	408.3	-
VCF10080M16	100	80	M16	263	-	408.3	-
VCF15050M16	150	50	M16	626.3	-	1173.6	-
VCF15050M20	150	50	M20	626.3	-	1173.6	-
VCF15055M16	150	55	M16	590.9	-	1076.6	-
VCF15055M20	150	55	M20	590.9	-	1076.6	-
VCF15060M16	150	60	M16	534.3	-	955.3	-
VCF15060M20	150	60	M20	534.3	-	955.3	-
VCF15075M16	150	75	M16	447.8	-	806	-
VCF15075M20	150	75	M20	447.8	-	806	-
VCF200100M20	200	100	M20	1200	-	2000	-

This information is for guidance only. Customers are recommended to contact us for further technical information on products and applications.
We reserve the right to alter specifications or withdraw products without notice.